


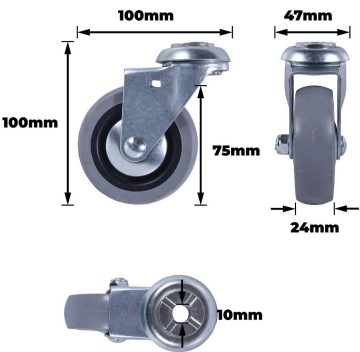

Product Code: G10A33G75

Specifications

|              |               |
|--------------|---------------|
| Outdoor Use  | Yes           |
| Indoor Use   | No            |
| Bearing Type | Plain Bearing |
| Raceway Type | Single        |
| Fitting Type | Bolt Hole     |

Appearance

|                |                   |
|----------------|-------------------|
| Product Colour | Grey/Black/Silver |
|----------------|-------------------|

Construction

|                     |                      |
|---------------------|----------------------|
| Wheel Core Material | Polypropylene        |
| Wheel Material      | Thermoplastic Rubber |
| Housing Material    | Steel                |
| Bearing Material    | Steel                |

Description

Easyroll 75mm Grey Rubber Bolt Hole G1 Series Castor 55kg is designed with a polypropylene wheel core and thermoplastic rubber wheels coupled with a steel housing and plain steel bearings. It is engineered for dependable load handling and smooth directional movement in various trade applications. The bolt-fix design and single raceway construction deliver consistent performance, making it a practical option for professionals requiring reliable and efficient mobility solutions.

Features

- Steel housing provides structural strength and durability
- Bolt fitting ensures secure and convenient installation
- Polypropylene core supports wheel stability and impact resistance
- Thermoplastic rubber wheel is durable and resilient
- Steel plain bearings enable smooth rotational movement
- Single raceway design reduces friction during turning
- Distinct grey black and silver accents aid identification
- Outdoor design withstands environmental challenges and rough handling

Dimensions

|                         |     |
|-------------------------|-----|
| Product Length mm       | 98  |
| Product Width mm        | 47  |
| Product Height mm       | 100 |
| Wheel Diameter          | 75  |
| Tread Width mm          | 23  |
| Finish Height mm        | 97  |
| Bolt Thread Length (mm) | 75  |
| Bolt Thread Width (mm)  | 10  |
| Mounting Size (G) mm    | M10 |