


Description

Easyroll 125mm Nylon I3 Series Castors 250kg 1PC is a white castor featuring a durable nylon wheel core, nylon wheel and a robust steel housing with ball bearing design. Its single raceway and rigid plate attachment deliver precise load distribution and smooth movement. This product offers practical mobility benefits and reliable performance that enhance handling and technical efficiency for industrial and trade professionals.

Features

- Robust steel housing ensures enduring stability
- Nylon wheel core minimises friction and wear
- Smooth ball bearings provide reliable motion
- Plate rigid attachment secures stable mounting
- White finish enhances equipment aesthetics
- Nylon wheel offers good wear resistance
- Steel bearings deliver robust load support
- Suitable for indoor and outdoor applications

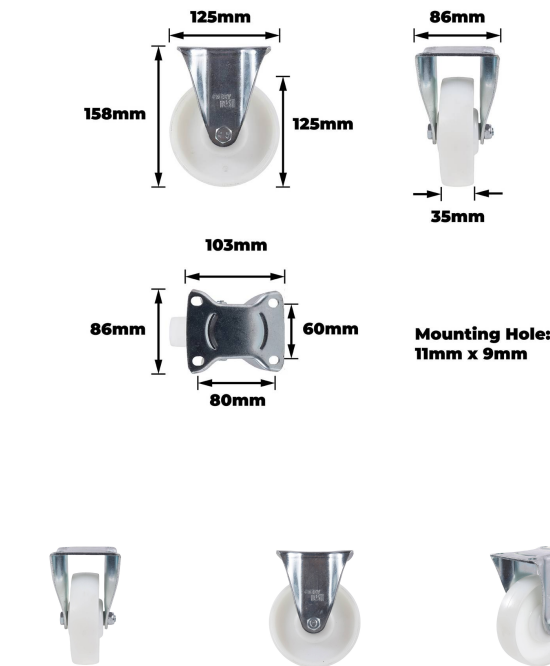

Product Code: I33AZ48K125

Specifications

|              |              |
|--------------|--------------|
| Outdoor Use  | Yes          |
| Indoor Use   | Yes          |
| Bearing Type | Ball Bearing |
| Raceway Type | Single       |
| Attachments  | Plate Rigid  |

Appearance

|                |       |
|----------------|-------|
| Product Colour | White |
|----------------|-------|

Construction

|                     |       |
|---------------------|-------|
| Wheel Core Material | Nylon |
| Wheel Material      | Nylon |
| Housing Material    | Steel |
| Bearing Material    | Steel |

Weights

|                        |       |
|------------------------|-------|
| Product Weight (grams) | 841   |
| Product Weight (kg)    | 0.841 |
| Load Capacity kg       | 250.0 |

Dimensions

|                             |        |
|-----------------------------|--------|
| Product Length mm           | 125    |
| Product Width mm            | 86     |
| Product Height mm           | 158    |
| Wheel Diameter              | 125    |
| Tread Width mm              | 35     |
| Mounting Hole Dimensions mm | 11x9   |
| Hole Centre Dimensions mm   | 80x60  |
| Plate Dimensions mm         | 103x86 |